


Jan 2000

MODEL	PRODUCT DESCRIPTION & FEATURES
1251 Intermediate Offset Pivot Full Mortise (Handed)	<ul style="list-style-type: none"> • Leaf height of 2½" (63.5)mm with no vertical load capacity • Maintains alignment of the door • Investment cast stainless steel • Needle bearings • Available in standard architectural finishes • Suggested for use with 1231S or 1233S

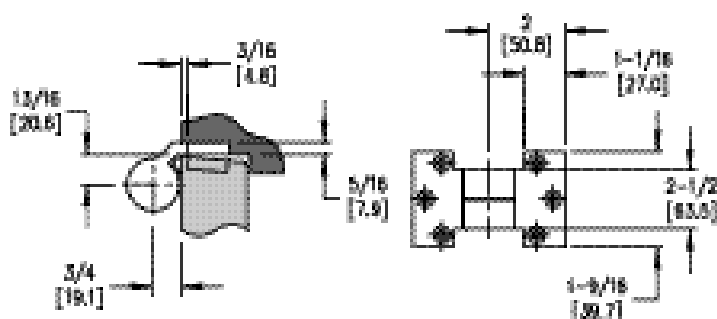

MODEL	PRODUCT DESCRIPTION & FEATURES
1257 Intermediate Offset Pivot Full Mortise (Handed)	<ul style="list-style-type: none"> • Maintains alignment of the door • Available for fire door assemblies (Prefix with "F") • ¾" offset (19.1)mm • Investment cast stainless steel • Needle bearings • Available in standard architectural finishes • Suggested for use with 1235S or 1237S

Note: On labeled door NFPA 80 requires one intermediate pivot per door height up to 90" (2286)mm and two intermediate pivots for doors from 90" (2286)mm to 120" (3048)mm

