

Model 219

Application

Half Surface
Handed


BHMA/ANSI NO: C07331



Product Description & Features

- Flush door and frame applications only
- Optional intermediate pivot where door portion cannot be mortised
- Maintains door alignment
- Available for fire door assemblies (*ferrous material*) – specify F219
- Non-ferrous base material
- 3/4" (19mm) offset only
- 1-3/4" door only
- Doors up to 90" (2286mm) in height should use one intermediate pivot. Each additional 30" (762mm) warrants another intermediate pivot
- Furnished with wood and machine screws

Technical Information

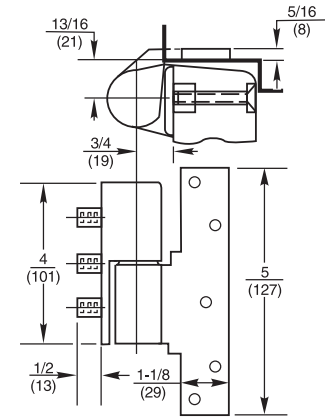

Model 319

Application

Half Mortise
Handed


BHMA/ANSI NO: C07341



Product Description & Features

- Flush door and frame applications only
- Optional intermediate pivot where jamb portion cannot be mortised
- Door portion from ML19 pivot is available if lead-lined door is used – specify L319 and door thickness
- Maintains door alignment
- Non-ferrous base material
- 3/4" (19mm) offset only
- Available for fire door assemblies (*ferrous material*) – specify F319
- Doors up to 90" (2286mm) in height should use one intermediate pivot. Each additional 30" (762mm) warrants another intermediate pivot
- Furnished with wood and machine screws

Technical Information

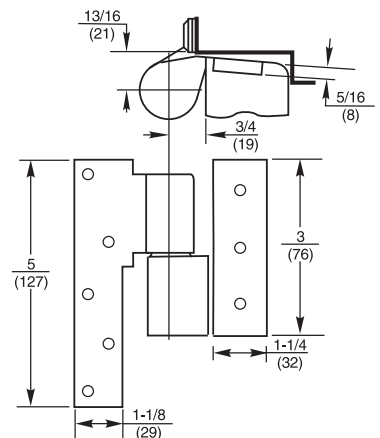

Model 419

Application

Full Surface
Handed

BHMA/ANSI NO: C07351



Product Description & Features

- Flush door and frame applications only
- Optional intermediate pivot where door and jamb portion cannot be mortised
- Maintains door alignment
- Non-ferrous base material
- 3/4" (19mm) offset only
- 1-3/4" door only
- Available for fire door assemblies (*ferrous material*) – specify F419
- Doors up to 90" (2286mm) in height should use one intermediate pivot. Each additional 30" (762mm) warrants another intermediate pivot
- Furnished with wood and machine screws

Technical Information

