

Heavy-Duty Single-Acting Center Hung Floor Closers

Model 28 x 554 Arm Center Hung

Application

- Single Acting, Handed
- Exterior or Interior Doors
- Weight to 350 lbs.
- Concealed Arm
- Sizes up to 4'0" x 8'6"***
(1219mm x 2591mm)



ANSI/C06021

* For doors taller than 8'6" use top pivot # 345 in lieu of 340


Product Description & Features

Concealed arm is designed to eliminate visible adjusting screws on face of door

- Arm bolt locks arm to closer spindle – adjustments made through heel of door
- Built-in positive dead stop prevents door from swinging beyond the desired opening degree (*specify 85°, 90°, 95° or 105°*)
- Separate and independent valves for closing speed, latch speed and backcheck
- Available non-hold open (N) or selective hold open (S) at same degree as dead stop
- Delayed action option – prefix "DA" (*non-hold open closers only*)
- Models available to meet ICC/ANSI A117.1 low opening force requirements, prefix "PH". (*For 8-1/2 lbs. of opening force prefix "PH" and suffix 8-1/2 lbs.*)
- Cold weather fluid option – specify "CWF" (*not available for closers with "DA"*)
- Sealed closer option – specify "SC"
- Available with floor plate or threshold installation (*floor plate shown*)
- Cylolac, rustproof cement case
- Standard top pivot: #340 included
- Not allowed for fire rated doors
- Frame stop required on the header at the lock side. If not supplied by frame manufacturer, recommend use of 60131 (*see Door Control Accessories page 92*).
- Furnished with wood and machine screws
- Extended spindles available in 1/2" increments up to 2" longer than standard

Technical Information

Frame stop required at lock edge

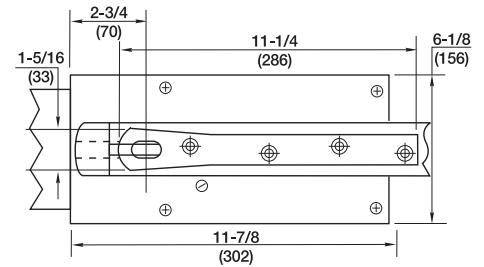

9/32

Radius door

