


Model ML19**Application**


- Heavy-Duty Full Mortise
- Handed

BHMA/ANSI NO: C07311

**Product Description & Features**

Screw holes spaced to straddle lead lining in center of door. Use on extra heavy or high traffic doors.

- Maintains door alignment
- Aids in installing floor closers and bottom pivot
- Available to accommodate door thicknesses 1-3/4" (44mm), 2" (51mm), 2-1/4" (57mm), 2-1/2" (64mm), or 3" (76mm) – specify thickness when ordering
- Load-bearing
- Non-ferrous base material
- 3/4" offset, for extended offsets consult factory
- Available for fire door assemblies – 1-3/4" (44mm) door only – specify FML19
- On labeled fire door assemblies, NFPA80 requires an intermediate pivot for every additional 30" (762mm) of door height over 60" (1524mm)
- For 20-minute label suffix "-20" to part number
- Furnished with wood and machine screws

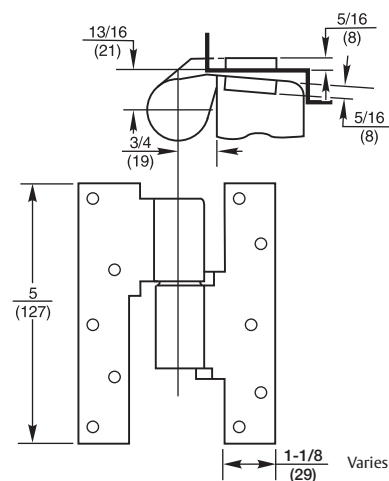Technical Information**Model FA19****Application**

Full Mortise
Asylum or High Security
Applications
Handed

BHMA/ANSI NO: C07361

**Product Description & Features**

Optional intermediate pivot for institutional use or installations where flat surfaces are objectionable

- Maintains door alignment
- Aids in installing bottom pivots
- 3/4" (19mm) offset
- May be used with fire door assemblies
- For 20-minute label suffix "-20" to the part number
- Ferrous base material
- Doors up to 90" (2286mm) in height should use one intermediate pivot. Each additional 30" (762mm) warrants another intermediate pivot
- Furnished with wood and machine Torx[®] screws

Technical Information