




TECTUS 340 3D

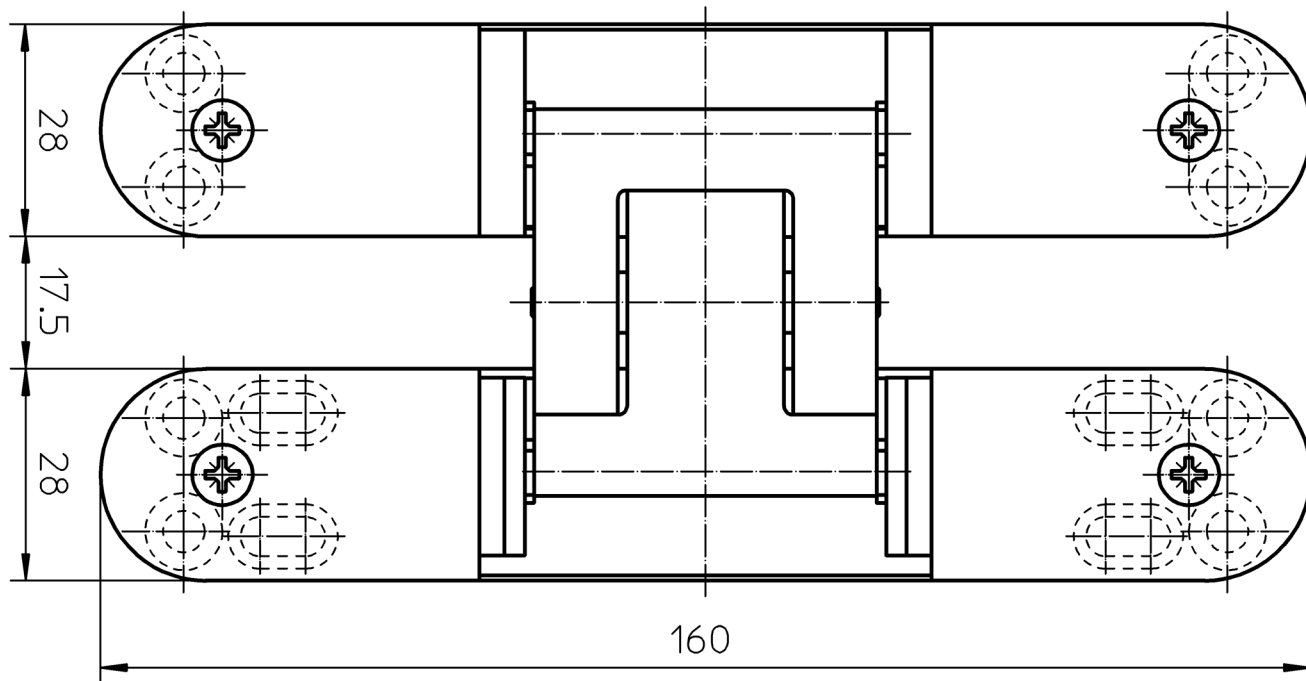

TECTUS 340 3D : BLOCK FRAME


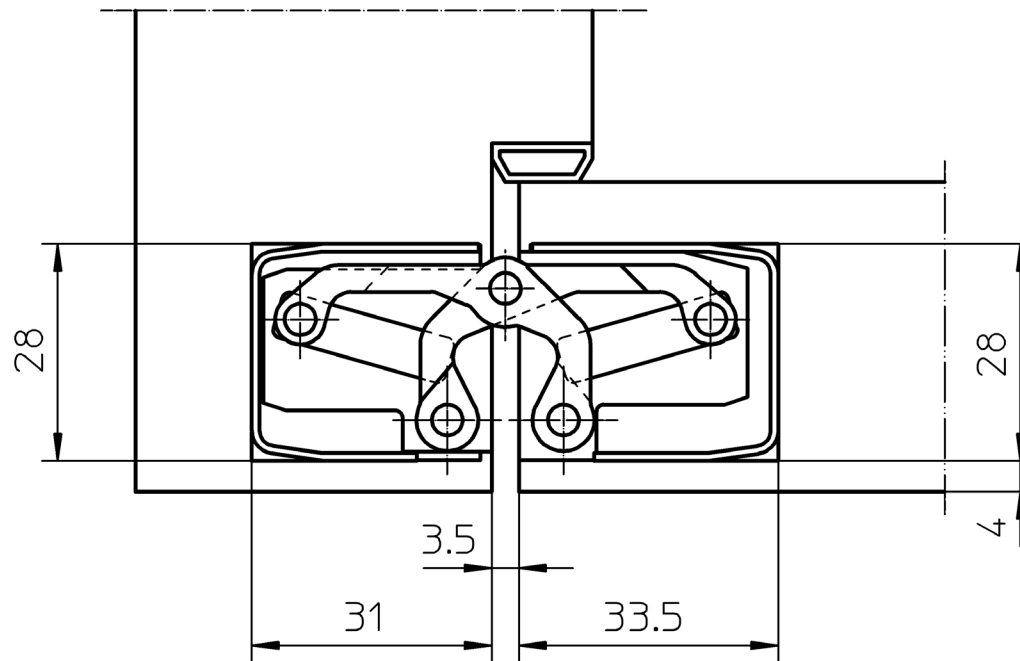


TECTUS 340 3D : BLOCK FRAME

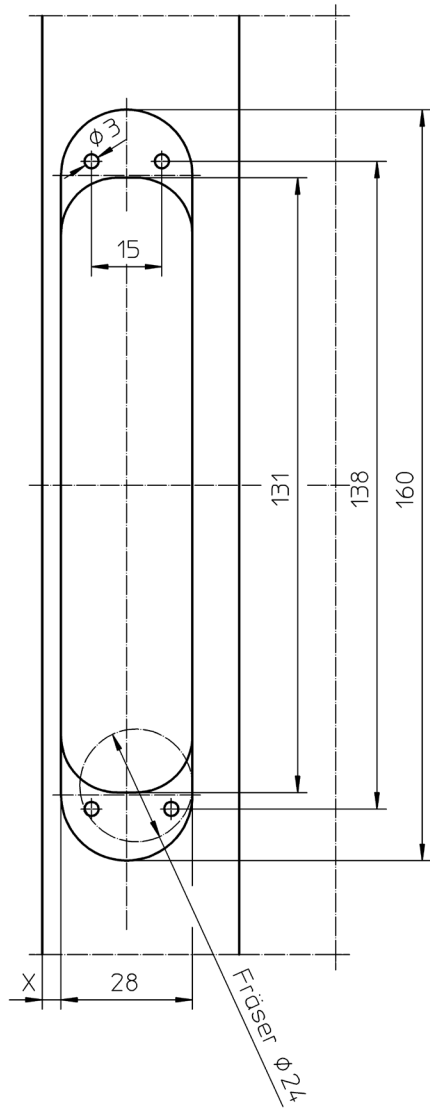


MILLING : FRAME

A = Depth of frame rebate up to sealing
 B = Thickness of door leaf resp. 1st door rebate
 $A - B + 4 = \text{Measure X}$
 The result has to be a measure between 4,0 mm and max. 7,0 mm. (Steel frame: X = 5 mm)

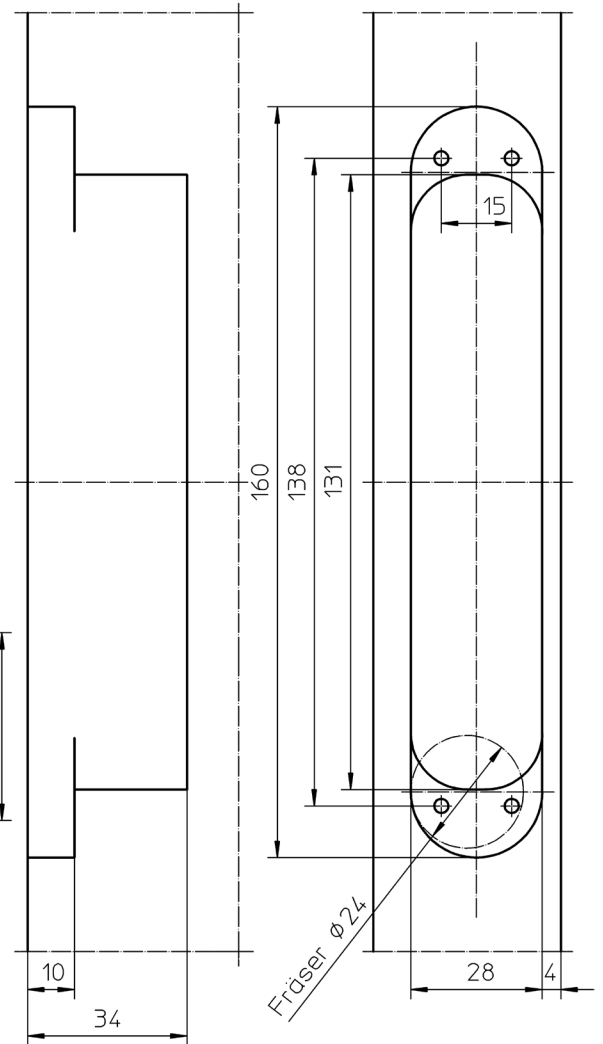
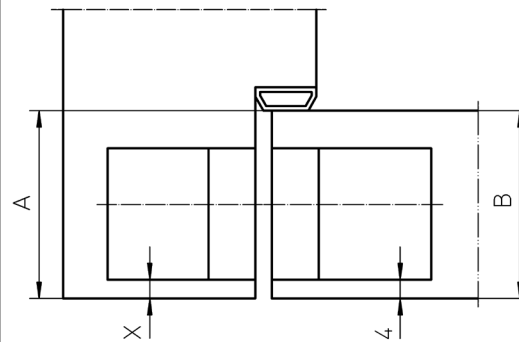


MILLING : DOOR LEAF

TECTUS 340 3D : CASING FRAME


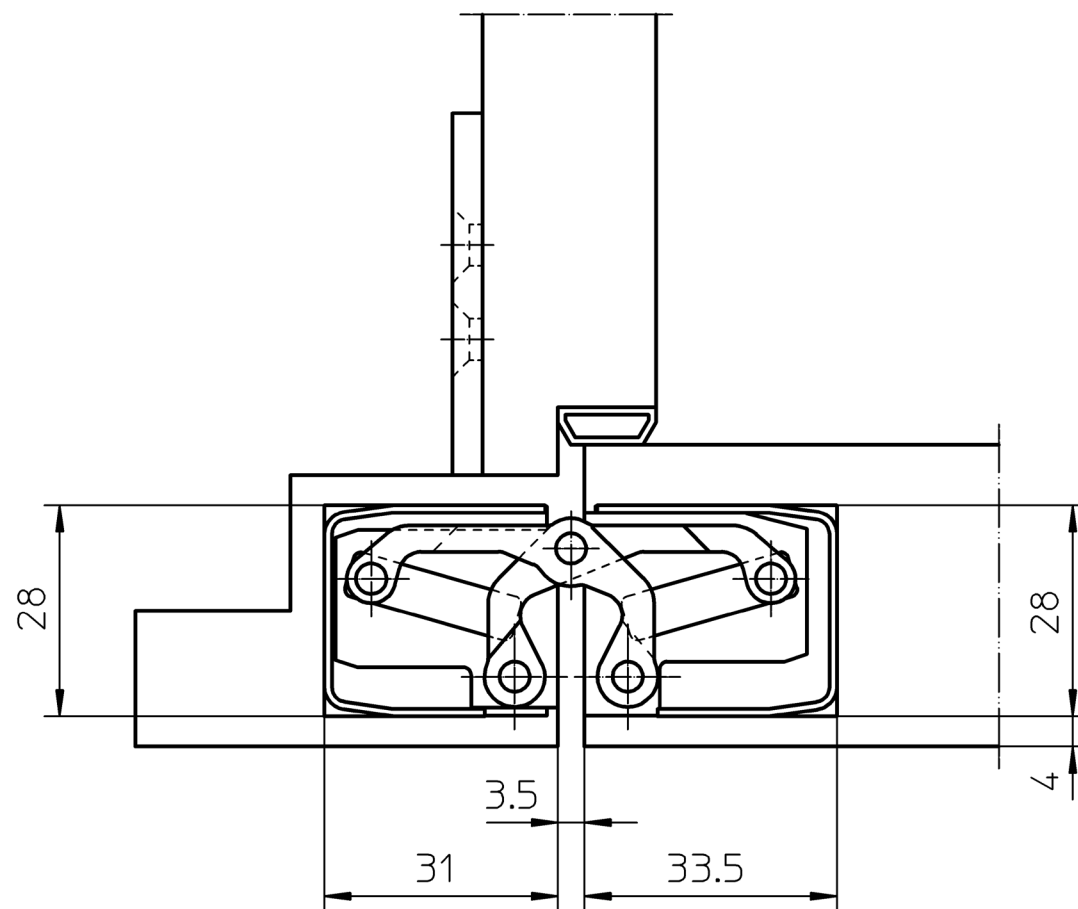


TECTUS 340 3D : CASING FRAME

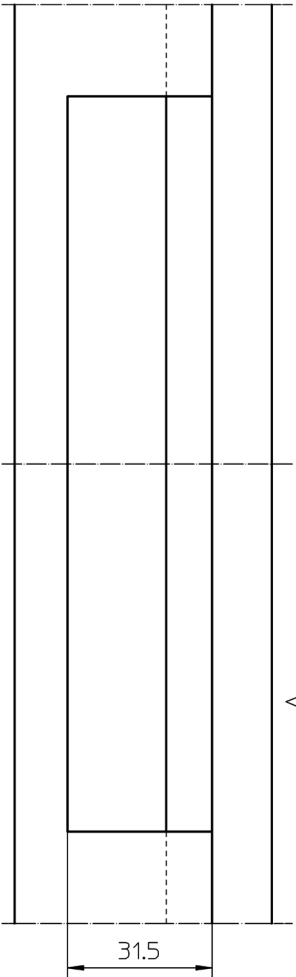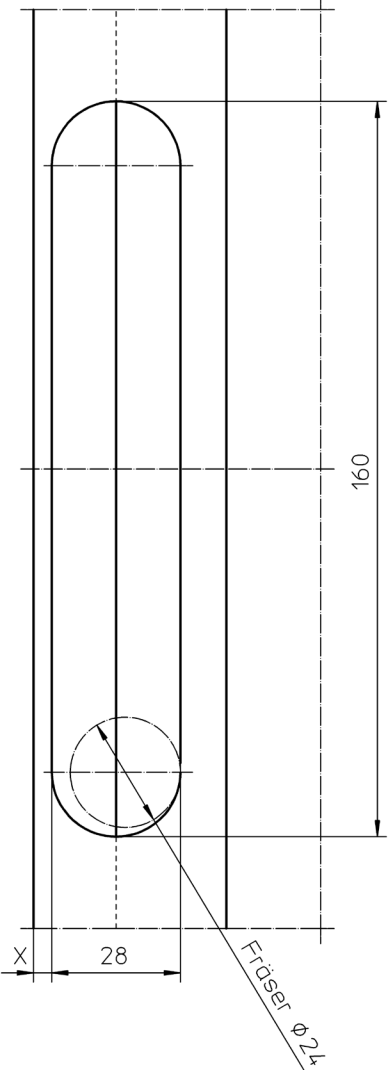

MILLING : FRAME


A = Depth of frame rebate up to sealing
 B = Thickness of door leaf resp. 1st door rebate
 $A - B + 4 =$ Measure X
 The result has to be a measure between 4,0 mm and max. 7,0 mm. (Steel frame: X = 5 mm)

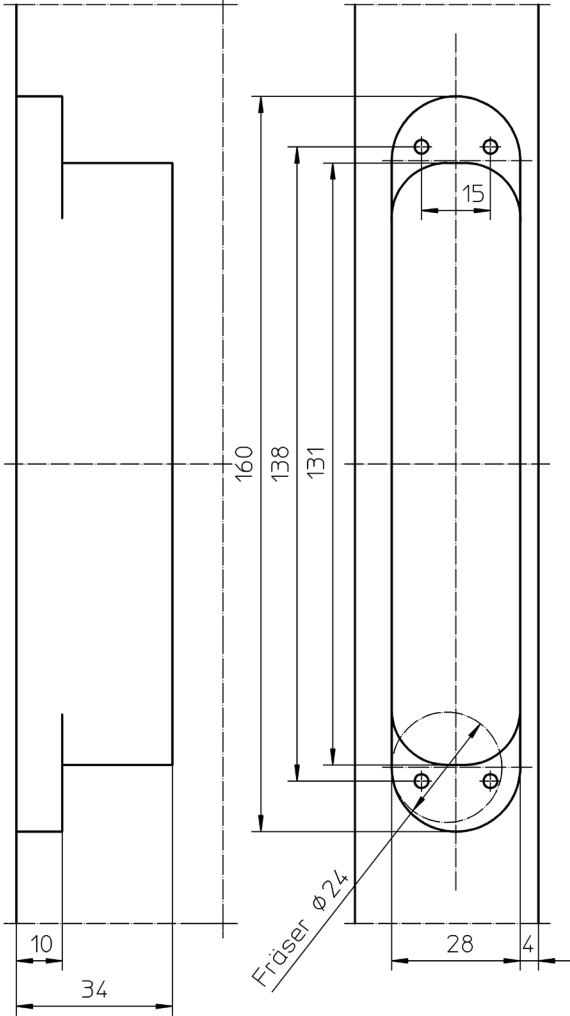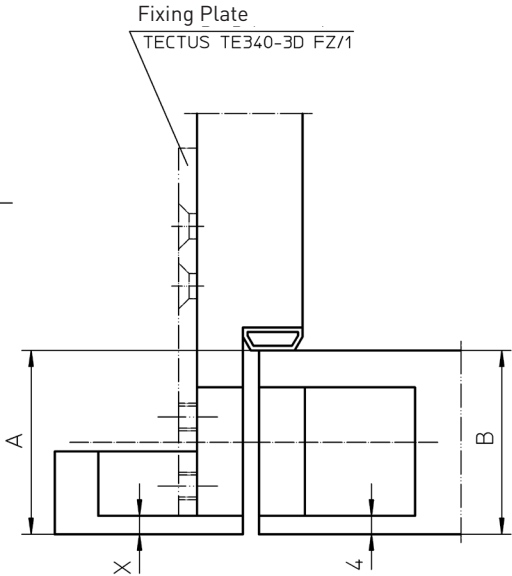


MILLING : DOOR LEAF

fräser : router bit



TECTUS 340 3D : STEEL FRAME

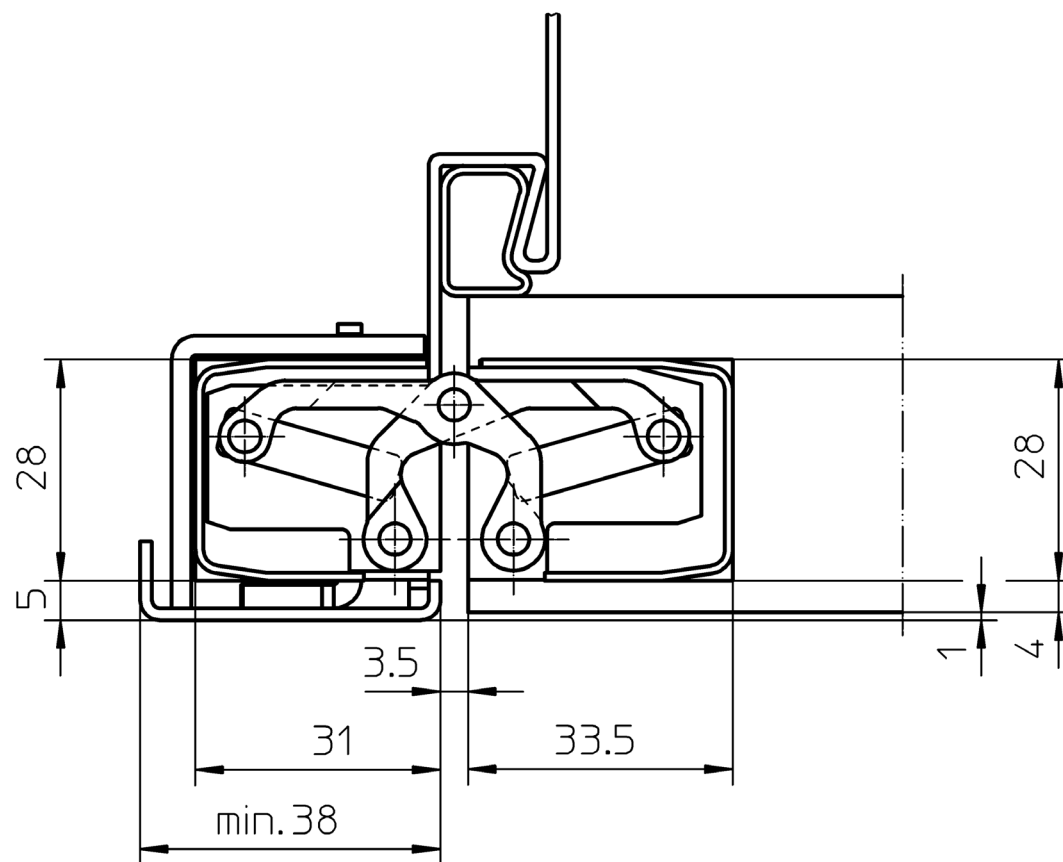

TECTUS 340 3D : STEEL FRAME

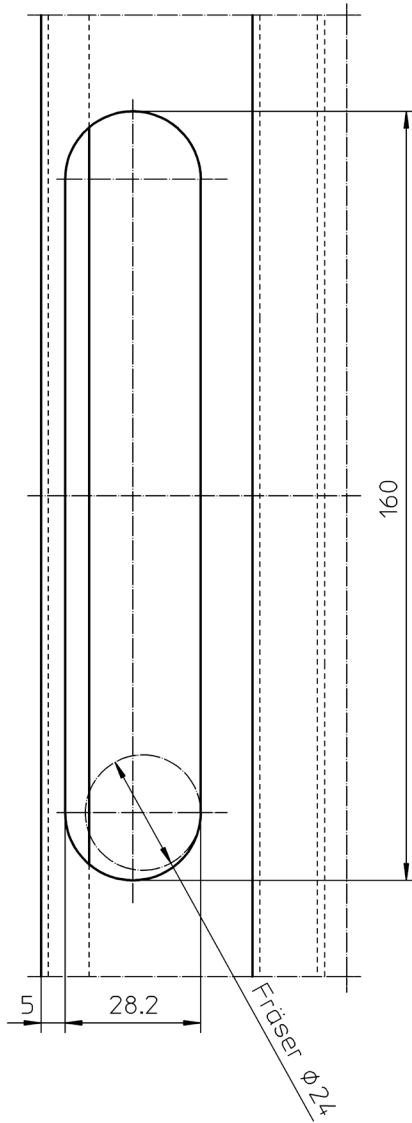

MILLING : FRAME

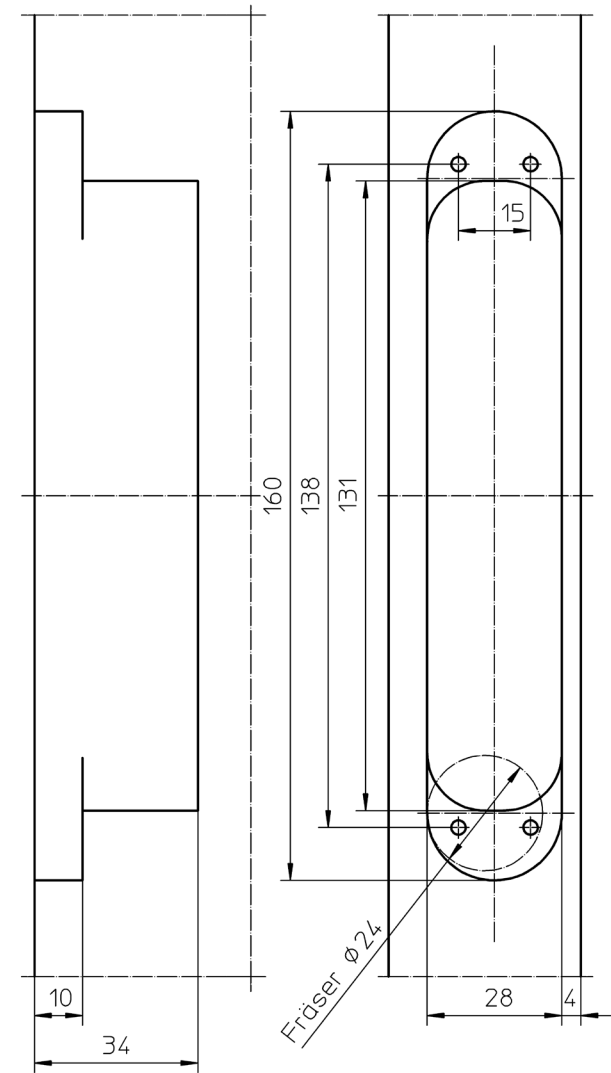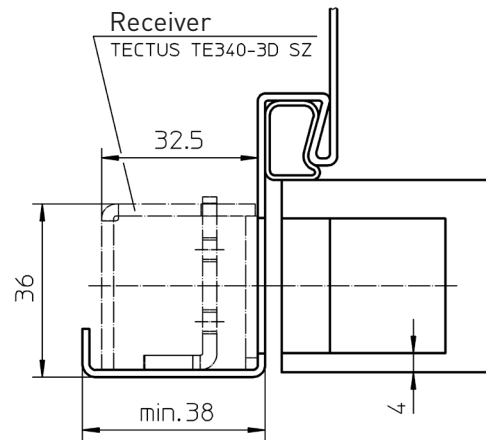

MILLING : DOOR LEAF

fräser : router bit